



The FireMaster Concertina Egress features the benefit of an integral egress door allowing the safe evacuation of building occupants or emergency services through the barrier without the need to lift the barrier once deployed. This product can be used as part of a fire engineering solution to protect a building and its occupants from the effects of fire and smoke.

The FireMaster Concertina Egress has been developed to provide a bespoke alternative to fixed non-loadbearing walls and partitions, It can be used in commercial, domestic and industrial applications such as airports, shopping centres, offices and hotels or where the need for maintaining open areas for access is vital.

Available in unlimited widths and shapes, the multi-sided fire curtain removes the requirement for columns or corners posts to suit different building applications.

FIREMASTER CONCERTINA EGRESS IS THE FIRST MULTI-SIDE FIRE CURTAIN TO OFFER AN INTEGRAL EGRESS DOOR

TESTED TO

UL 10D (Fire Tests of Fire Protective Curtain Assemblies) UL 864 (10th Ed) for Motors and Controls

CERTIFICATION

Complete barrier assemblies are certified by UL, which is an accredited certification body operating to ISO/IEC 17065:2012



PERIOD OF FIRE RESISTANCE

120 minutes endurance (for use in gypsum and masonry wall type constructions) with or without ResQ-Window™

BENEFITS

- BARRIER EGRESS
 Egress of evacuees or access for emergency services through the barrier
- ANY POINT OF EGRESS
 Can include multiple egress doors at any exit point
- STANDARD CONFIGURATION
 Square, Rectangular, L Shaped and Circular FireMaster Open and Closed Concertina products available
- CUSTOMISED CONFIGURATION
 FireMaster Open and Closed designs
 can be configured to suit a variety of
 non-standard shapes and sizes
- REQUIRED

 No support posts required, the


 Concertina offers open plan
 environments

NO COLUMNS AND CORNER POSTS

COMPLIANCY AND FEATURES

- FireMaster® Concertina™ Egress active fire curtain barrier assemblies have been tested for fire resistance and self-closing to UL 10D.
- Motors and controls used with the FireMaster® Concertina™ Egress fire curtain barrier have been tested to UL 864 (10th Ed).
- Maximum width of 1000mm egress door
- The egress door can be installed on both the FireMaster Concertina Open and Closed products
- A ResQ-Window[™] Vision Panel can be installed into the curtain or egress door if required.
- Can be sign written to indicate point of egress



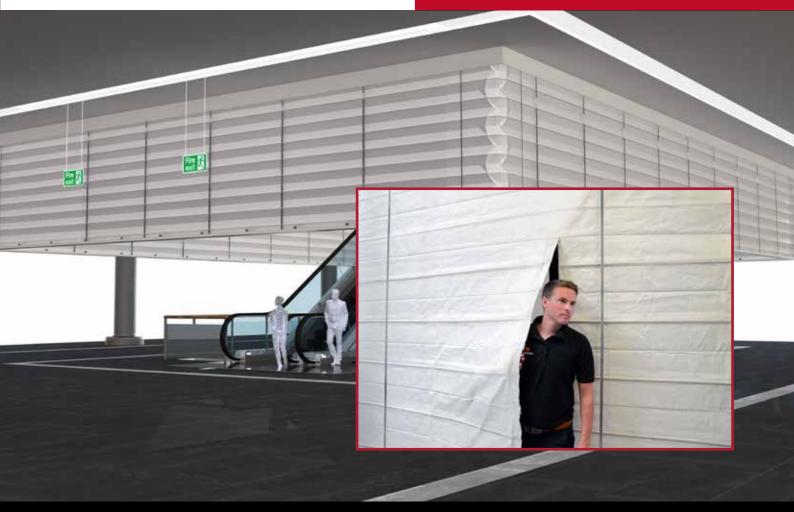

LEADING THE WAY IN FIRE PROTECTION

LEADING THE WAY IN FIRE PROTECTION

For information, to get a quote or to book a CPD workshop

Please call:

+44 (0)2392 454 405

or E-mail: info@coopersfire.com WWW.COOPERSFIRE.COM

© Coopers Fire Ltd. All content and products are copyright of Coopers Fire Ltd. Registered in England Number: 2010274. Multiple patents granted and pending.

Coopers Fire Ltd Ignis House, Houghton Avenue Waterlooville, Hampshire PO7 3DU. United Kingdom

Phone: +44 (0)2392 454 405 Email: info@coopersfire.com Web: www.coopersfire.com Coopers Fire Ltd has a policy of continuous product improvement.

As such we reserve the right to change design and specifications without prior notice.

Please check our website for the latest information.

v01 Aug 2020



